

STARK SM

LED A A+ A++



IP65





RAL Code



CLASS I

220-240V
AC

CRI>80

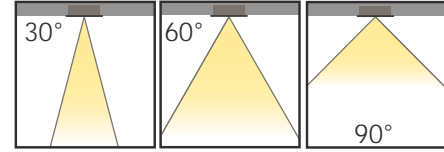

Extruded aluminium body with electrostatic powder coated,
High efficiency reflector and extra clear tempered glass,
Effective thermal design,
50.000 hours Led lifetime,
Narrow, medium and wide beam angle options,
Emergency kit system can be integrated,
Please inquire for optionzal power values.

Elektrostatik toz boyalı alüminyum ekstrüzyon gövde,
Yüksek verimli reflektör ve extra clear temperli cam,
Etkili termal tasarım,
50.000 saat Led yaşam ömrü,
Dar, orta ve geniş açı seçenekleri,
Acil aydınlatma kit sistemi uygulanabilir,
Opsiyonel güç değerleri için bizimle iletişime geçebilirsiniz.

Consuming Power 50W 70W
Tüketim Gücü (L : 250mm) (L : 320mm)

Light Source POWER LED
Işık Kaynağı

Color Temperature 3000K 5000K
Renk Sıcaklığı 4000K 6500K

Luminaire Output Lumen 6016lm 8422lm
Armatür Çıkış Akısı

Efficiency 120lm/W
Verimlilik

Power Factor Pf>90
Güç Faktörü

Forward Current 500mA 500mA
Sürüş Akımı

Weight 2,75 Kg 3,60 Kg
Ağırlık

